


# 1200 Series

PC Board Mountable Pressure Sensor  
Temperature Compensated  
0 – 100mV Output  
Gage, Absolute, Differential  
Current/Voltage Excitation

## 1200 Series

The 1200 series is a temperature compensated, piezoresistive silicon pressure sensor packaged in a dual-in-line configuration.

Integral temperature compensation is provided over a wide temperature range using laser-trimmed resistors. An additional laser-trimmed resistor is included to normalize pressure sensitivity variations by programming the gain of an external differential amplifier.

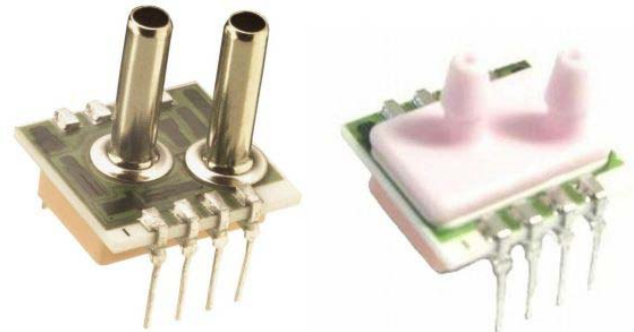

## FEATURES

- Dual-in-Line Package
- 1.0% Interchangeable Span (provided by gain set resistor)
- Solid State Reliability
- Wide Compensated Temperature Range

## APPLICATIONS

- Medical Instruments
- Airspeed and Altitude Measurements
- Process Control
- Factory Automation
- Vacuum Measurement
- Handheld Calibrators
- Leak Detection
- Sleep Apnea
- Respirators/Ventilators
- Air Duct Flow

# 1200 Series

## Product Definition

Model	Pressure Ranges	Type (G = Gage A = Absolute D = Differential)	Span	Supply Voltage	Current	Compensated Temperature	Unique Feature
<a href="#">1210 Sub psi</a>	0 - 5, 10" in H <sub>2</sub> O	G, D	40mV		1.5mA	0°C to 60°C	Barbed port option Current excitation
<a href="#">1210 1psi</a>	0 - 1psi	G, D	100mV		1.5mA	0°C to 50°C	Barbed port option Current excitation
<a href="#">1210 Standard</a>	0 - 2, 5, 15, 30, 50, 100psi	G, A, D	100mV		1.5mA	0°C to 50°C	Barbed port option Current excitation
<a href="#">1220 1psi</a>	0 - 1psi	G, D	50mV	1.235Vref		0°C to 50°C	Voltage excitation
<a href="#">1220 Standard</a>	0 - 2, 5, 15, 30, 50, 100psi	G, A, D	50mV	1.235Vref		0°C to 50°C	Voltage excitation
<a href="#">1230 UltraStable™</a>	0 - 15, 30, 50, 100psi	G, A, D	100mV		1.5mA	-20°C to +85°C	Current excitation UltraStable™
<a href="#">1240 UltraStable™</a>	0 - 15, 30, 50, 100psi	G, A, D	50mV	1.235Vref		-20°C to +85°C	Voltage excitation UltraStable™

### NORTH AMERICA

Measurement Specialties  
 45738 Northport Loop West  
 Fremont, CA 94538  
 Tel: 1-800-767-1888  
 Fax: 1-510-498-1578  
 Sales: [pfg.cs.amer@meas-spec.com](mailto:pfg.cs.amer@meas-spec.com)

### EUROPE

Measurement Specialties  
 (Europe), Ltd.  
 26 Rue des Dames  
 78340 Les Clayes-sous-Bois, France  
 Tel: +33 (0) 130 79 33 00  
 Fax: +33 (0) 134 81 03 59  
 Sales: [pfg.cs.emea@meas-spec.com](mailto:pfg.cs.emea@meas-spec.com)

### ASIA

Measurement Specialties  
 (China), Ltd.  
 No. 26 Langshan Road  
 Shenzhen High-Tech Park (North)  
 Nanshan District, Shenzhen 518057  
 China  
 Tel: +86 755 3330 5088  
 Fax: +86 755 3330 5099  
 Sales: [pfg.cs.asia@meas-spec.com](mailto:pfg.cs.asia@meas-spec.com)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.